

CX-1-03

530kHz to 2.1MHz


MINIATURE QUARTZ CRYSTAL
FOR PARALLEL OSCILLATORS

Page
1 of 2

Telephone: +44(0)1460 230000
Fax: +44(0)1460 230001
Email: sales@euroquartz.co.uk
Web: www.euroquartz.co.uk


General Description

The CX-1 quartz crystal is a high quality extensional mode resonator. The CX-1 is hermetically sealed in a rugged, miniature ceramic package, a quarter of the size of an eight pin dual-in-line package. The crystal is manufactured utilizing a photo-lithographic process, ensuring consistency and repeatability of electrical characteristics.

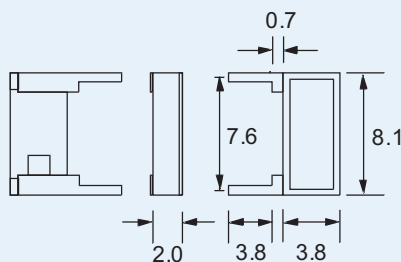

Outline and Dimensions

Equivalent Circuit

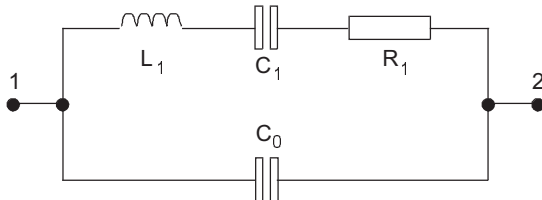

R_1 Motional Resistance L_1 Motional Inductance
 C_1 Motional Capacitance C_0 Shunt Capacitance

- Extensional mode
- Ideal for use with microprocessors
- Designed for low-power applications
- Compatible with hybrid packaging
- Low ageing
- Full military environmental testing available
- Ideal for battery operated applications

Specification

Frequency Range:	530kHz to 2.1MHz
Functional Mode:	Extensional
Calibration Tolerance*:	A ±0.05% (±500ppm) B ±0.1% C ±1.0%
Load Capacitance:	7pF
Motional Resistance (R_1):	3kΩ max.
Motional Capacitance (C_1):	1.2fF
Quality Factor (Q):	150,000
Shunt Capacitance (C_0):	1.0pF max.
Drive Level:	3μW max.
Turning Point (T_0)**:	35°C
Temperature Coefficient (k):	-0.035ppm/°C ²

Note: Frequency deviation (f) from frequency (fo) @ turning point temperature (To):

$$\frac{f-f_0}{f_0} = k(T-T_0)^2$$

Ageing, first year:	±5ppm max.
Shock:	750g 0.3ms, 1/2 sine
Vibration, survival:	10g rms 10-1,000Hz random
Operating Temperature:	-10°~+70°C (commercial) -40°~+85°C (industrial) -55°~+125°C (military)
Storage Temperature:	-55°C~+125°C
Process Temperature:	Lead to Package temp. not to exceed 175°C Glass lid to package seal rim temp. not to exceed 210°C

Specifications are typical at 25°C unless otherwise indicated.

- * Closer calibration available
** Other turning point available

CX-1-03

530kHz to 2.1MHz

MINIATURE QUARTZ CRYSTAL
FOR PARALLEL OSCILLATORS

Page
2 of 2

Telephone: +44(0)1460 230000
Fax: +44(0)1460 230001
Email: sales@euroquartz.co.uk
Web: www.euroquartz.co.uk

Typical Application

Typical application for Pierce oscillator

The low-profile CX miniature leaded crystal is ideal for small, high density, battery operated portable products. A CX crystal incorporated into a Pierce oscillator (single inverter) circuit provides a high stability with low current consumption. A conventional HCMOS Pierce oscillator circuit is shown below. The crystal is effectively inductive and in a Pi-network circuit with C_1 and C_2 providing the additional phase shift necessary to sustain oscillation. The oscillation frequency (f_0) is 15 to 150ppm above the crystals series resonant frequency (f_s).

Drive Level

R_A is used to limit the crystal's drive level by forming a voltage divider between R_A and C_1 . R_A also stabilizes the oscillator against changes in the amplifier's output resistance (R_0). R_A should be increased for higher voltage operation.

Load Capacitance

The CX crystal calibration tolerance is influenced by the effective circuit capacitances, specified as the load capacitance (C_L). C_L is approximately equal to:

$$C_L = \frac{C_1 \times C_2}{C_1 + C_2} + C_S$$


NOTE: C_1 and C_2 include stray layout capacitance to ground. C_S is the stray shunt capacitance between the crystal terminals. In practice, the effective value of C_L will be less than that calculated from C_1 , C_2 , and C_S values due to the effect of the amplifier output resistance. C_S should be minimized.

The oscillation frequency (f_0) is approximately equal to:

$$f_0 = f_s \left[1 + \frac{C_1}{2(C_0 + C_L)} \right]$$

Where F_s = Series resonant frequency of the crystal
 C_1 = Motional Capacitance
 C_0 = Shunt Capacitance

Conventional HCMOS Pierce Oscillator Circuit

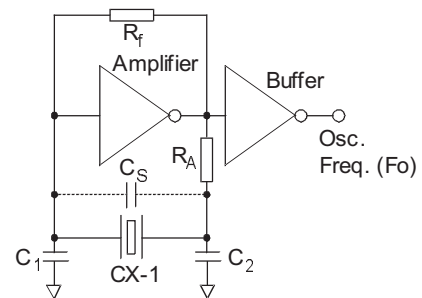

Packaging

CX-1-03 - Tray Pack (Standard)

Order Code

