

### FEATURES

- **Miniature size: 5.0mm x 3.2mm x 1.0mm height**
- **Gold-plated ceramic base with metal seam-welded lid**
- **To minimize EMI the whole crystal may be grounded**
- **High shock and vibration resistance**
- **Ideal for PDAs, GPS, PCMCIA, Wireless LAN etc.**

### DESCRIPTION

MJ crystals are miniature surface-mount crystals produced with a ceramic substrate and seam-welded metal lid. Their compact size and low mass make them an ideal crystal for high-density applications.

### SPECIFICATION


<b>Frequency Range:</b>	
AT-Cut Fundamental:	7.0MHz to 50.0MHz
AT-Cut 3rd Overtone:	40.0MHz to 125.0MHz
<b>Calibration Tolerance at 25°C:</b>	
	from $\pm 5$ ppm ( $\pm 10$ , $\pm 20$ or $\pm 30$ ppm standard)
<b>Frequency stability</b>	
-10° to +60°C	from $\pm 5$ ppm
-20° to +70°C	from $\pm 10$ ppm
-40° to +90°C	from $\pm 15$ ppm
<b>Storage Temperature:</b>	
	-50° ~ +105°C
<b>Effective Series Resistance and Mode</b>	
7.0MHz to 50.0MHz:	50Ω max., AT-Cut Fundamental
40.0MHz to 125.0MHz:	80Ω max., AT-Cut 3rd Overtone
<b>Operating Temperature Range:</b>	
	from 0° ~ +50°C to -55° ~ +105°
<b>Shunt Capacitance (C0):</b>	
	2pF to 4pF typical, 5pF maximum
<b>Load Capacitance (CL):</b>	
	Series or from 10pF to 32pF (Customer specified CL)
<b>Ageing:</b>	
	< $\pm 3$ ppm per year at +25°C
<b>Drive level:</b>	
	100 $\mu$ W maximum
<b>Reflow Soldering:</b>	
	10s maximum at 260°C twice or 180s at 230°C, once.
<b>Package:</b>	
	Ceramic base, metal (Kovar) lid, Hermetic seal
<b>Packaging:</b>	
	12mm EIA tape and reel 1000 pieces per reel

### ENVIRONMENTAL SPECIFICATION

<b>RoHS Status:</b>	Compliant
<b>Gross Leak:</b>	1kg pressurized water immersion test as per Euroquartz procedures.
<b>Fine Leak:</b>	< $5 \times 10^{-8}$ atm cc/s -helium leak test
<b>Shock:</b>	$\pm 5$ ppm max. Free drop 3 times from 75cm height onto a hard wooden board or half sine wave acceleration of 100g peak amplitude for 11 ms duration, 3 cycles each plane.
<b>Vibration:</b>	$\pm 5$ ppm max., frequency 10 to 55Hz, amplitude 1.5mm or 10g rms. Duration 6 hours.
<b>Solderability:</b>	MIL-STD-883, Method 2003
<b>Humidity:</b>	48 hours at 85°C, relative humidity, non-condensing
<b>Thermal Shock:</b>	Temperature cycling: Exposed to -40°C for 30 minutes then to +85°C for 30 minutes, - duration 5 days.



### OUTLINE & DIMENSIONS

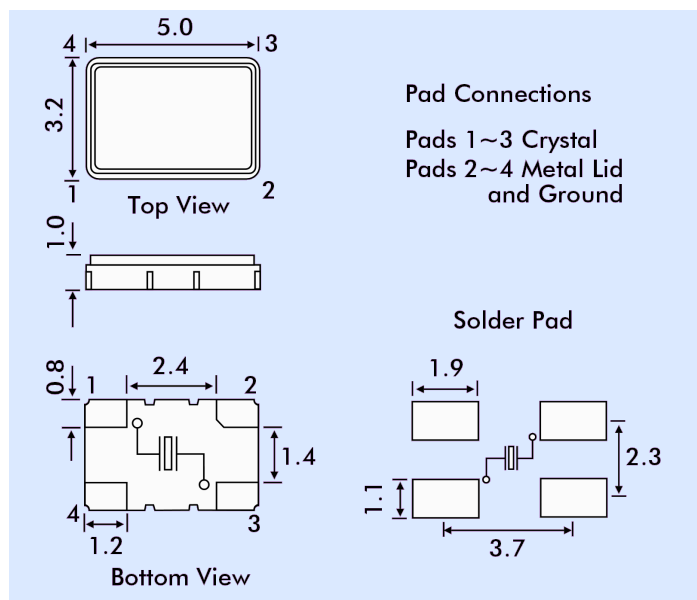

### PART NUMBER GENERATION

Part numbers for MJ crystals are generated as follows:

