


OUTLINES & DIMENSIONS

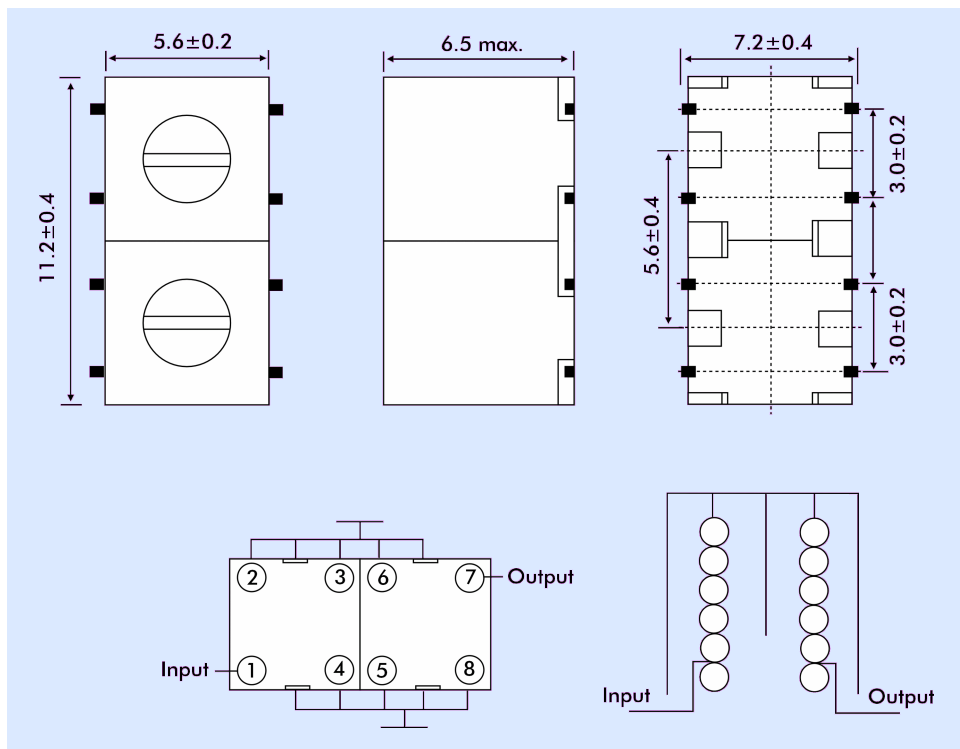

5HX2 REFERENCE SPECIFICATIONS

Centre Frequency f_0 ($\pm 5\%$) MHz	Tunable Range \pm MHz.	Insertion Loss dB max.	Bandwidth (-1.0dB) MHz min.	Ripple MHz max.	Attenuation		Input/Output Impedance Ω	Operating Temperature $^{\circ}$ C
					$f_0 - ()$ MHz dB typ. MHz.	$f_0 + ()$ MHz dB typ. MHz.		
350	10	6.5	6.0	1.0	25(50)	20(50)	50	-10 to +50
400	10	6.0	6.0	1.0	25(50)	20(50)	50	-10 to +50
430	10	5.5	6.0	1.0	25(50)	20(50)	50	-10 to +50
435	10	5.5	6.0	1.0	25(50)	20(50)	50	-10 to +50
445	10	5.0	6.0	1.0	25(50)	20(50)	50	-10 to +50
500	10	5.0	6.0	1.0	25(50)	15(50)	50	-10 to +50
550	10	5.0	6.0	1.0	25(50)	15(50)	50	-10 to +50
600	10	5.0	6.0	1.0	18(50)	13(50)	50	-10 to +50
700	10	5.0	6.0	1.0	16(100)	12(100)	50	-10 to +50
800	10	5.0	6.0	1.0	13(100)	10(100)	50	-10 to +50