


- Miniature 5 x 3.2 x 1.3mm SMD package
- Wide frequency range: 6.4MHz to 40.0MHz
- Supply voltage 2.5, 3.0, 3.3 or 5.0 Volts
- Frequency stability from  $\pm 1$ ppm over -30 to +75°C
- RoHS compliant



### DESCRIPTION

EM53T series TCXOs are packaged in a miniature 4 pad ceramic SMD package. With squarewave (CMOS) output, tolerances are available from  $\pm 1.0$ ppm over -30° to +75°C. The part has a 0.01 $\mu$ F decoupling capacitor built in.

### SPECIFICATION

Product Series Code	TCXO: EM53T VCTCXO: VEM53T
Frequency Range:	6.4MHz to 40.0MHz
Output Waveform:	Squarewave, HCMOS
Initial Calibration Tolerance:	$< \pm 2.0$ ppm at +25 $\pm 2$ °C
Standard Frequencies:	10.0, 12.8, 13.0, 14.7456, 16.000, 16.384, 19.2, 19.440, 19.68, 20.0, 25.0 27.0 <i>(Partial list)</i>
Operating Temperature Range:	See table
Frequency Stability	
vs. Ageing:	$\pm 1.0$ ppm max. first year
vs. Voltage Change:	$\pm 0.3$ ppm max. $\pm 5\%$ change
vs. Load Change:	$\pm 0.3$ ppm max. $\pm 10\%$ change
vs. Reflow (SMD type):	$\pm 1.0$ ppm max. for one reflow <i>(Measured after 24 hours)</i>
Supply Voltage:	+2.5, +3.0, +3.3 or +5.0V <i>(See table)</i>
Output Logic Levels:	Logic High: 90% Vdd min. Logic Low: 10% Vdd max.
Rise and Fall Times:	10ns max.
Duty Cycle:	50% $\pm 10\%$ standard, 50% $\pm 5\%$ option
Start-up Time:	5ms typical, 10ms max.
Current Consumption:	See table below
Output Load:	15pF
Storage Temperature:	-55~+125°C

### FREQUENCY STABILITY


Frequency Stability (ppm)		$\pm 0.5$	$\pm 1.0$	$\pm 1.5$	$\pm 2.0$	$\pm 2.5$	$\pm 3.0$
Temperature Range (°C)	0 ~ +50	✓	✓	✓	✓	✓	✓
	-10 ~ +60	ASK	✓	✓	✓	✓	✓
	-20 ~ +70	x	✓	✓	✓	✓	✓
	-30 ~ +75	x	✓	✓	✓	✓	✓
	-30 ~ +85	x	✓	✓	✓	✓	✓
	-40 ~ +85	x	ASK	✓	✓	✓	✓

✓ = available, x = not available, ASK = call Technical Sales

### INPUT VOLTAGE & CURRENT CONSUMPTION

Input Voltage/ Frequency	+2.8V	+3.0	+3.3V	+5.0 V
8.192MHz	2mA	2mA	5mA	
10.0MHz	3mA	4mA	7mA	
77.760MHz	14mA	17mA	32mA	
155.520MHz	26mA	35mA	50mA	

### EM53T - OUTLINES AND DIMENSIONS

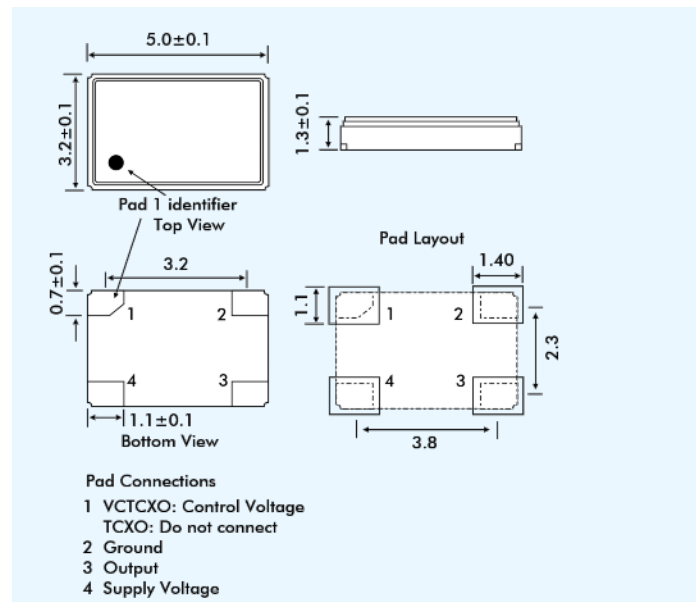

### VEM53T VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = +1.5 $\pm 1.0$ Volts for all input voltages. <i>(Contact technical sales if +2.5<math>\pm 2.0</math> Volts is required.)</i>
Frequency Deviation:	$\pm 5.0$ ppm min. (Vcon = +1.5V $\pm 1.0$ V)
Slope Polarity:	Positive <i>(increase of control voltage increases output frequency.)</i>
Input Impedance:	50k $\Omega$ minimum
Modulation Bandwidth:	20kHz minimum
Linearity:	$\pm 10\%$ maximum

### SSB PHASE NOISE at 25°C

Offset	10Hz	100Hz	1kHz	10kHz	100kHz
at 10.0MHz (dBc/Hz)	-96	-122	-138	-145	-150
at 77.760MHz (dBc/Hz)	-74	-105	-120	-124	-120
at 155.250MHz (dBc/Hz)	-68	-96	-110	-117	-112

### PART NUMBERING PROCEDURE

