

FEATURES

- **Miniature size: 7.0mm x 5mm x 1.2mm height**
- **Gold-plated ceramic base with metal seam-welded lid**
- **To minimize EMI the whole crystal may be grounded**
- **Tight tolerance of ± 10 ppm for telecommunications use**
- **High shock and vibration resistance**
- **Ideal for PDAs, GPS, PCMCIA and hand-held equipment**

DESCRIPTION

Miniature surface-mount MQ crystals are produced using a ceramic substrate and fitted with a hermetically-sealed metal lid. The crystals are competitively priced, well-suited to mass-market electronic applications and may also be produced to close tolerances making this crystal a good choice for applications requiring low mass and tight tolerances.

SPECIFICATION

Frequency Range	AT-Cut Fundamental: 6.0MHz to 50.0MHz AT-Cut 3rd Overtone: 40.0MHz to 200.0MHz
Calibration Tolerance at 25°C*:	from ± 5 ppm (± 10 , ± 20 or ± 30 ppm standard)
Frequency stability	
-10° to +60°C	from ± 5 ppm
-20° to +70°C	from ± 10 ppm
-40° to +90°C	from ± 15 ppm
-55 to +125°C	from ± 50 ppm
Storage Temperature:	-55°~+105°C
Effective Series Resistance:	See table
Load Capacitance (CL):	Series or from 8pF to 32pF (Customer specified CL)
Ageing:	< ± 3 ppm per year at +25°C
Drive level:	10 μ W (typ.) 100 μ W (max.)
Reflow Soldering:	10s maximum, 260°C twice or 180s at 230°C, once.
Package:	Ceramic base, metal lid, Hermetic seal
Packaging:	16mm EIA tape and reel 1000 pieces per reel

PART NUMBER GENERATION


Example: 12.000MHz MQ/20/30/- 10+60/18pF/60R

- Nominal Frequency
- Package
MQ = 4 pad
- Calibration tolerance at 25°C (\pm ppm)
- Temperature Stability over temp. range (\pm ppm)
- Operating Temp. Range (°C)
Lower and upper limits
- Load Capacitance
Either SR for series or CL in pF
- Equivalent Series Resistance
Optional - use when special value is required



OUTLINE & DIMENSIONS

MQ

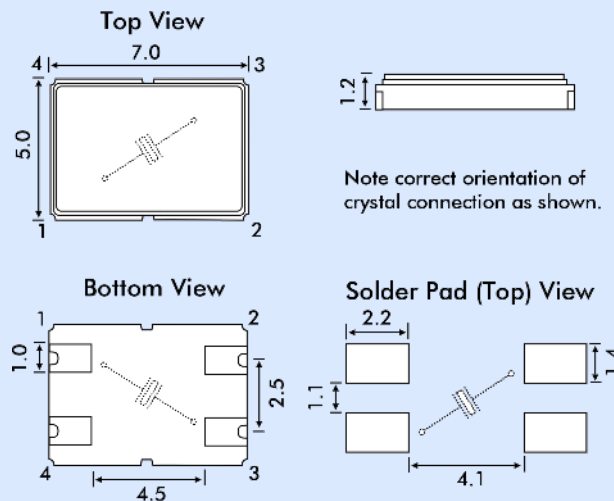

Note correct orientation of crystal connection as shown.

*Note: Pads 2 & 4 are connected to case (grounded).

* Note: These parts may be supplied with the chamfered pad in different positions. However, the crystal connection is always as shown above.

EFFECTIVE SERIES RESISTANCE

Frequency Range MHz	Crystal Cut/ Mode	ESR Ω Max.
6.0 ~ 8.0	AT Fund.	80
8.1 ~ 11.0	AT Fund.	60
11.1 ~ 14.0	AT Fund.	50
14.1 ~ 50.0	AT-Fund.	40
40.1 ~ 50.0	AT 3rd OT	80
50.1 ~ 200.0	AT 3rd OT	90