




OUTLINES & DIMENSIONS

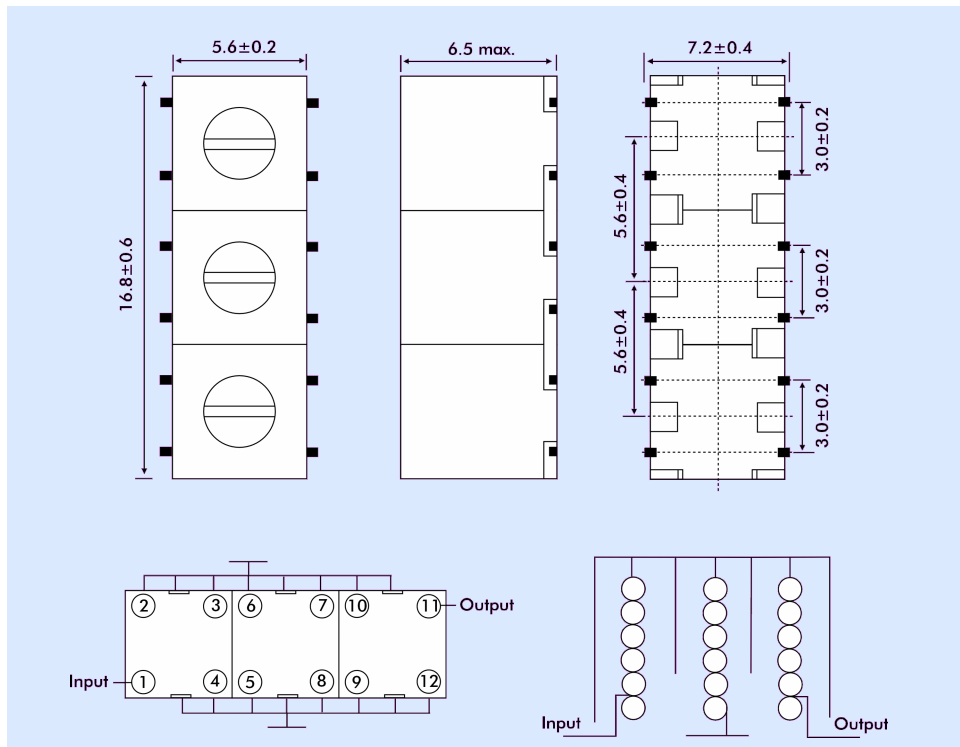

5HX3 REFERENCE SPECIFICATIONS

Centre Frequency f_0 ($\pm 5\%$) MHz	Tunable Range \pm MHz.	Insertion Loss dB max.	Bandwidth (-1.0dB) MHz min.	Ripple MHz max.	Attenuation		Input/Output Impedance Ω	Operating Temperature $^{\circ}$ C
					$f_0 - ()$ MHz dB typ. MHz.	$f_0 + ()$ MHz dB typ. MHz.		
350	10	10.0	6.0	1.0	40(50)	35(50)	50	-10 to +50
370	10	9.0	6.0	1.0	40(50)	35(50)	50	-10 to +50
400	10	8.0	6.0	1.0	40(50)	30(50)	50	-10 to +50
445	10	8.0	6.0	1.0	40(50)	25(50)	50	-10 to +50
470	10	8.0	6.0	1.0	30(50)	22(50)	50	-10 to +50
500	10	8.0	6.0	1.0	30(50)	20(50)	50	-10 to +50
600	10	8.0	6.0	1.0	25(50)	18(50)	50	-10 to +50
700	10	8.0	6.0	1.0	25(100)	15(100)	50	-10 to +50
800	10	8.0	6.0	1.0	20(100)	15(100)	50	-10 to +50