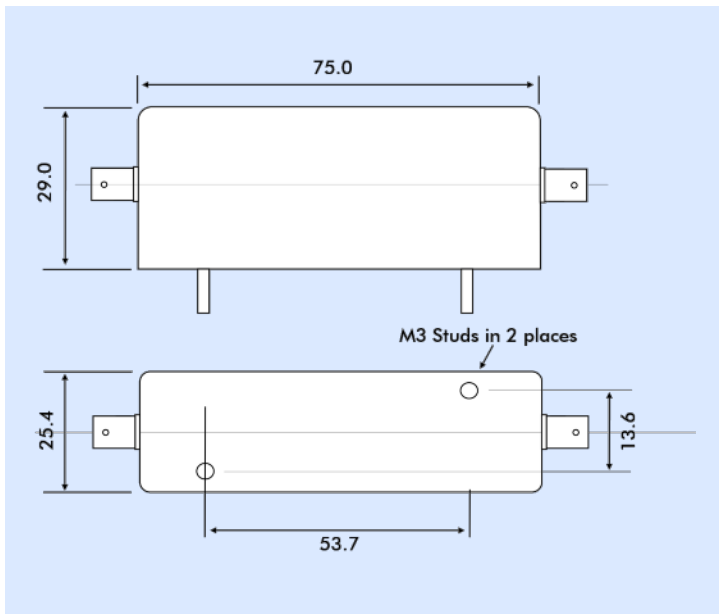


High Frequency Crystal Filter - Narrow Band

- High frequency crystal filter

OUTLINE & DIMENSIONS

SPECIFICATION

Centre Frequency:	140.0MHz to 175.0MHz
±15kHz minimum:	3dB
Ripple	1 dB max.
22dB Band:	±25kHz typ.
40dB Band:	±40kHz typ.
60dB Band:	±60kHz typ.
Ultimate Attenuation:	60dB
Insertion Loss:	6dB max.
Terminations:	50Ω
Poles:	4
Operating Temperature Range:	-20° to +70°C
Spurious:	30dB typical

Part Number	Connector In	Connector Out	Connector Types	
FN07360	BNC Female	BNC Female	BNC - Female	BNF
FN07361	SMA Female	SMA Female	BNC - Male	BNM
FN07362	N Type Female	N Type Female	SMA - Female	SMF
FN07363	N Type Male	N Type Male	SMA - Male	SMM
FN07364	Please specify	Please specify	N Type - Female	NF
			N Type - Male	NM

PART NUMBER GENERATION

150.000MHz	FN07364	BNF	/	BNF
Frequency	Part Number	Connector IN		Connector OUT