

High Shock, Ultra-Miniature SMD

16MHz to 50MHz

FEATURES

- Frequency Range 16MHz to 50MHz
- Mechanical shock survivability up to 75,000g
- Ultra-low profile and outline ceramic package
- Low acceleration sensitivity available
- Low ageing
- Full MIL testing available

DESCRIPTION

CX11LHG crystals are high performance devices designed to survive extreme shock and high vibration environments. Low acceleration sensitivity and low ageing performance are coupled with tight calibration and temperature tolerances.

SPECIFICATION

Specifications stated are typical at 25°C unless otherwise indicated. Specifications may change without notice.

Parameters	16.0MHz	24.0MHz	32.0MHz
Frequency 1:	16.0MHz	24.0MHz	32.0MHz
Motional Resistance R1 (Ω):	85	30	25
Motional Capacitance C1 (ff):	1.5	1.6	1.9
QualityFactor Q (k):	80	150	110
Shunt Capacitance C0 (pF):	0.7	0.7	0.9

Calibration Tolerance 2:	±100 to ±30ppm <i>or tighter as required</i>
Load Capacitance:	10pF (<i>unless specified otherwise</i>)
Drive Level:	200µW maximum
Frequency-Temperature Stability 2,3:	
Commercial:	±50ppm to ±10ppm
Industrial:	±50ppm to ±20ppm
Military:	±100ppm to ±30ppm
Ageing:	±5ppm maximum (<i>first year</i>)
Shock, survival:	<75,000g, 0.3ms, ½ sinewave
Vibration, survival 4:	20g, 10~2000Hz swept sinewave
Operating Temperature Range:	-10°C to +70°C (Commercial) -40°C to +85°C (Industrial) -55° to +125°C (Military)
Storage Temperature Range:	-55°C to +125°C
Maximum Process Temperature:	260°C for 20 seconds maximum

1. For frequencies above 50MHz contact Euroquartz
2. Other tolerances are available.
3. Does not include calibration tolerance. The characteristics of the frequency stability over temperature follow that of the AT thickness-shear mode.
4. Per MIL-STD-202G, Method 204D, Condition D. Random vibration testing also available.
5. Crystal designed and manufactured in USA by Statek Inc.

PACKAGING OPTIONS

CX11LHG crystals are available either tray packed (<250pcs) or tape and reel (>250 pieces).
12mm tape, 178mm or 330mm reels (EIA 418).


HOW TO ORDER CX11LHG CRYSTALS

CX11L - S - HG3 - C - SM1 - 24.0M, 100 / 100 / - / I

Blank = Standard S = Special or custom	Blank = 5000g HG1 = 10000g HG2 = 20000g HG3 = 30000g HG4 = 50000g HG5 = 75000g	C = Ceramic Lid	Terminations SM1 = Gold plated * SM2 = Solder plated SM3 = Solder dipped SM4 = Solder plated * SM5 = Solder dipped * * = Lead free	Frequency M = MHz	Calibration Tolerance @ 25°C (in ppm)	Temp. Range C = Commercial I = Industrial M = Military S = Customer specified
---	---	-----------------	--	----------------------	---------------------------------------	---

Frequency Stability over Temp. Range (-/ ppm)

OUTLINE & DIMENSIONS

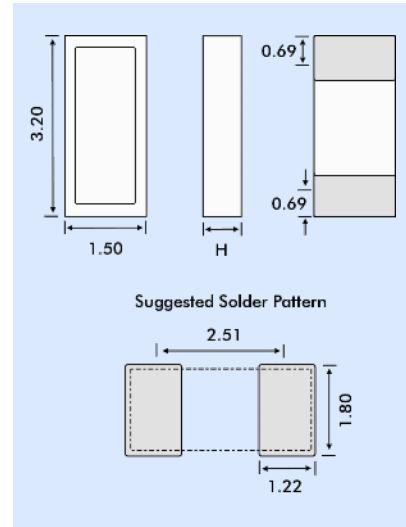


Dimension H	Typical	Maximum
SM1	0.51	0.59
SM2/SM4	0.53	0.60
SM3/SM5	0.58	0.63

TERMINATIONS - PLATING

Designation	Termination
SM1	Gold Plated (Lead Free)
SM2	Solder Plated
SM3	Solder Dipped
SM4	Solder Plated (Lead Free)
SM5	Solder Dipped (Lead Free)

CRYSTAL EQUIVALENT CIRCUIT

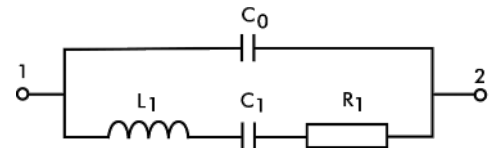

R1 Motional Resistance L1 Motional Inductance
C1 Motional Capacitance C0 Shunt Capacitance