



frequency control solutions

texo

T70

TIGHT TEMPERATURE STABILITY
RUGGED PACKAGE

Product Description

Greenray Industries' T70 Series TCXOs offer reliable, precision performance for mobile, battery-powered apps. It has been developed as a reference oscillator for critical timing applications that require tight temperature stability, low supply current, a very rugged package, and a small footprint. The T70 Series is well-suited to use in exploration and tracking equipment applications.



Features

- Small and rugged 7.0 x 5.0 mm package
- Withstand vibration, and high shock up to 50,000 g
- Tight temperature stability of $\pm 0.3\text{ppm}$ over -40°C to $+85^\circ\text{C}$
- Excellent long-term aging $< 5\text{ppm}$ over 10 years
- Low acceleration sensitivity: $< 0.7\text{ppb/g}$
- Low power consumption, enable reliable, battery-operated performance gains
- Low phase noise

Applications

- Telecommunications
- High-shock electronics
- Mobile radio
- Mobile instrumentation
- Airborne communications
- Wireless communications
- Microwave receivers
- Smart munitions

Rev. D



ISO 9001
Quality

Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2011 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



AS9100
Aerospace



frequency control solutions

T70 SERIES
10 MHz to 50 MHz



Electrical Characteristics

Frequency Characteristics						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency	+25°C	10		50	MHz	
Frequency Stability (other stabilities available)	-10°C to +60°C		± 0.1		ppm	G17
	-20°C to +70°C		± 0.1		ppm	N17
	-40°C to +85°C		± 0.3		ppm	T37
	-55°C to +95°C		± 1.0		ppm	V16
Aging	1 st year, for 10 MHz		± 0.5	± 1	ppm	
Acceleration Sensitivity	(Note 1)			2.5	ppb/g	SD
				0.7	ppb/g	LG
Frequency vs Reflow	After 24hrs recovery			1	ppm	
Electronic Frequency Control	EFC = 0 to V _{DD} Positive slope		± 7		ppm	
DC Supply						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Supply Voltage (V _{DD})		3.0	3.3	3.6	VDC	T70, T72
		4.75	5.0	5.25	VDC	T71, T73
Input Current	CMOS			6	mA	T70, T71
	Clipped Sinewave			3	mA	T72, T73
RF Outputs available: CMOS and Clipped Sinewave						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
CMOS Output						T70, T71
Load			15		pF	
Level	V _{DD} =3.3V	+2.8 "1" Level		+0.2 "0" Level	V	T70
	V _{DD} =5.0V	+4.2 "1" Level		+0.2 "0" Level	V	T71
Symmetry		40	50	60	%	
Clipped Sine Output						T72, T73
Load			10 pF // 10k Ω			
Level		+0.8			V p-p	

(1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g



ISO 9001
Quality

Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2011 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



AS9100
Aerospace



frequency control solutions

T70 SERIES
10 MHz to 50 MHz



Environmental Screenings



Environmentals				
Screening	Conditions	Method, Condition	Notes	Ordering Code
Vibration	MIL-STD-202G	214A, I-F	0.3 PSD, 20.71 g RMS	
Shock	MIL-STD-202G	213, I	100 g, 5 ms, Sawtooth Shock available up to 50,000 g	HG

Ordering (Example)

T70	-	N17	-	LG	-	20.0MHz	-	E
Model		Stability Code		G-Sensitivity Code		Frequency in MHz		Termination finish
Model: Input V Output		Refer to Electrical Specs Table*		SD: < 2.5 ppb/g		From 10 to 50 MHz		E: Gold plated (RoHS), Standard
T70 +3.3V CMOS		G17 (-10°C to +60°C)		LG: < 0.7 ppb/g				PB: SnPb 63/37 (non-RoHS)
T71 +5.0V CMOS		N17 (-20°C to +70°C)		HG: Customer-specific				LF: SnAg 96.5/3.5 (Lead-free)
T72 +3.3V Clipped Sine		T37 (-40°C to +85°C)						
T73 +5.0V Clipped Sine		V16 (-55°C to +95°C)						

*other frequency stabilities available, for further information please contact factory

Recommended Solder Reflow Profiles

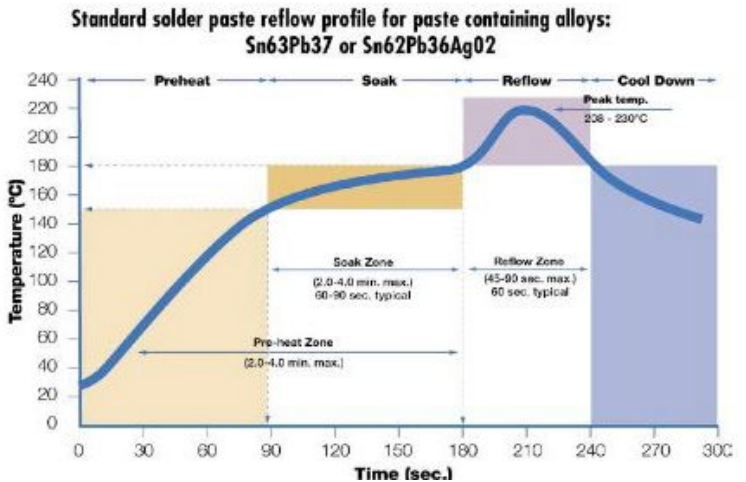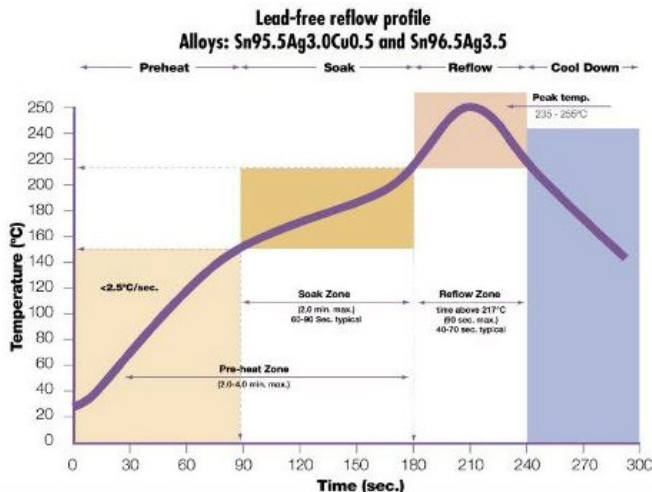

ISO 9001
Quality

Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2011 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



AS9100
Aerospace




frequency control solutions

T70 SERIES
10 MHz to 50 MHz



Package information

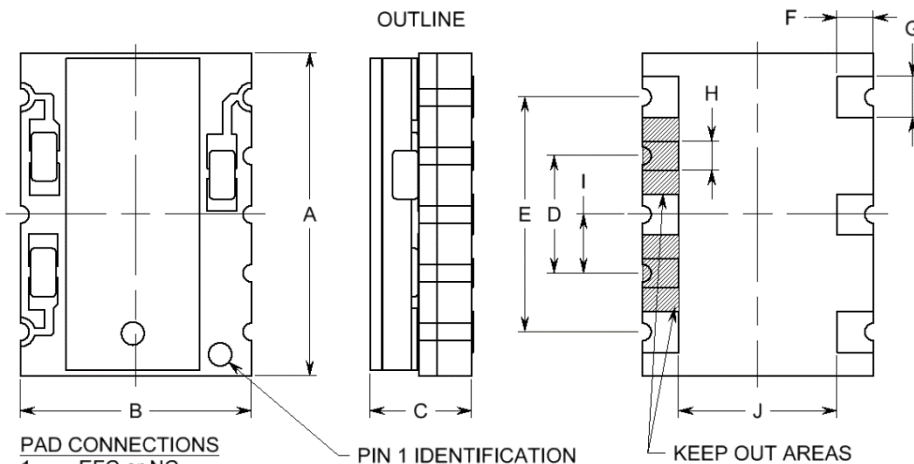

PAD CONNECTIONS


1. EFC or NC
 2. SCLK (INTERNAL USE ONLY)
 3. 0V & CASE GND
 4. OUTPUT
 5. TRI-STATE/VREF/UTIL (SEE TABLE 1 FOR TRI-STATE FUNCTION)
 6. SUPPLY
- A. DIA (INTERNAL USE ONLY)
B. CS (INTERNAL USE ONLY)

PART DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
A	0.275	7.00	0.280	7.11
B	0.197	5.00	0.202	5.13
C	NA	NA	0.100	2.54
D	0.100	2.54	0.105	2.67
E	0.200	5.08	0.205	5.21
F	0.031	0.79	NA	NA
G	0.035	0.89	NA	NA
H	0.025	0.64	NA	NA
I	0.050	1.27	0.055	1.40
J	0.135	3.43	0.140	3.56

TABLE 1: TRI-STATE FUNCTION

PAD 5	ENABLE/DISABLE FUNCTION
HIGH (SUPPLY)	OUTPUT ENABLED
OPEN (NC)	OUTPUT ENABLED
LOW (GND)	HIGH IMPEDANCE DISABLED

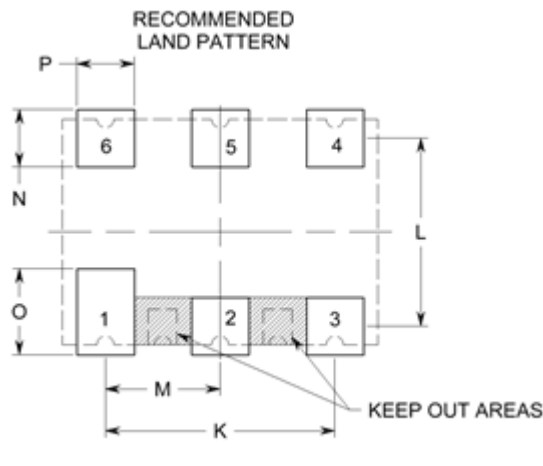

LAND PATTERN DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
K	0.200	5.08	0.205	5.21
L	0.164	4.17	0.169	4.29
M	0.100	2.54	0.105	2.68
N	0.050	1.27	NA	NA
O	0.050	1.27	NA	NA
P	0.075	1.91	NA	NA



ISO 9001
Quality

Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2011 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



AS9100
Aerospace