


- Industry-standard 7 x 5mm 6 pad SMD package
- Frequency range 1.25MHz to 50.0MHz
- CMOS Output
- Supply Voltage 2.5, 3.3 VDC
- Integrated Phase Jitter 1ps maximum



DESCRIPTION & APPLICATIONS

G576 VCXOs are packaged in the industry-standard 7 x 5 x 1.7mm 6 pad SMD package. G series VCXOs use fundamental mode crystal oscillators for low phase noise. Applications include phase lock loop, SONET/ATM, set-top boxes, MPEG, audio/video modulation, video game consoles, Fibre Channel, FPGAs, Data Acquisition and HDTV.


SUPPLY VOLTAGE-DEPENDENT SPECIFICATION

Input Voltage (V _{DD}):	V _{DD} = +2.5VDC ±5%	V _{DD} = +3.3VDC ±5%
Frequency Range:	1.25MHz ~ 50.0MHz	1.25MHz ~ 50.0MHz
Output Waveform:	CMOS	CMOS
Initial Frequency Accuracy (at 25°C):	To tune to nominal fr. with V _c =1.25±0.2V	To tune to nominal fr. with V _c =1.65±0.2V
Output Logic HIGH '1'	2.25V (min.)	2.97V (min.)
Output Logic LOW '0'	0.25V (max.)	0.33 (max.)
Frequency Deviation Range:	Standard: ±80ppm (min.)	Standard: ±80ppm (min.)
Control Voltage Centre	1.25V	1.65V
Control Voltage Range:	0.25V to 2.25V	0.3V to 3.0V

GENERAL SPECIFICATION

Frequency Stability:	See table
Input Voltage:	+2.5V ±5% or +3.3V ±5%
Output Load:	15pF
Rise/Fall Time:	6ns max, 4ns typ. (10%~90% V _{dd})
Duty Cycle:	50 ±10% standard, 50 ±5% option
Integrated Phase Jitter:	1ps maximum (12kHz to 20MHz)
Start-up time:	10ms max., 3ms typical
Current Consumption:	10 to 45mA, frequency dependant (27MHz: 10mA typical at 3.3V, 20mA typical at 5.0VDC)
Linearity:	6% typical, 10% maximum
Modulation Bandwidth:	10kHz min. measured at V _{cont} = 1.65V or 2.5V
Input Impedance:	5MΩ typical
Slope Polarity:	Monotonic and Positive, increasing control voltage increases output frequency
Ageing:	±3ppm per year max.
RoHS Status:	RoHS Compliant and lead (Pb) free
OE Control:	Enable: 70% of V _{DD} min. OE time: 2ms max. Disable: 30% of V _{DD} max. (High impedance) Disable time: 100ns

OUTLINE & DIMENSIONS

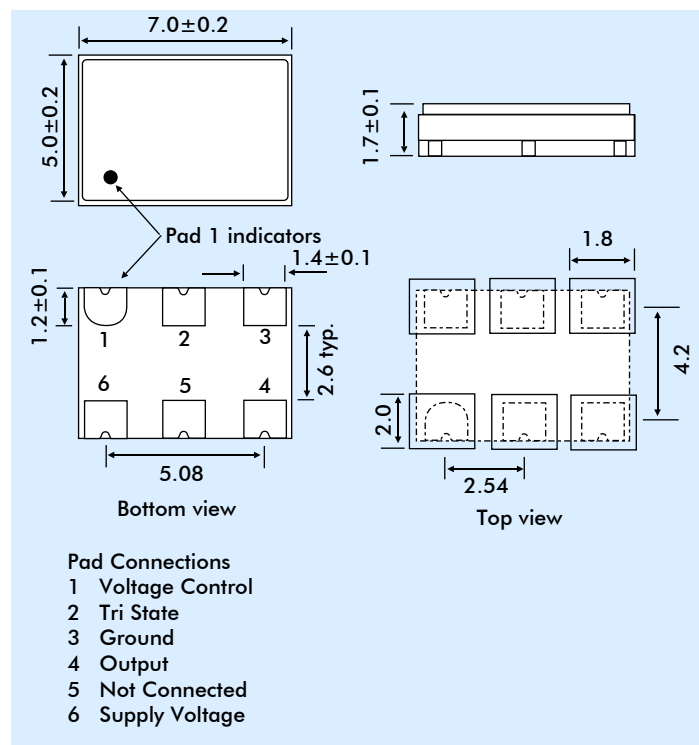

PHASE NOISE

27.0MHz 3.3V supply	Offset:	10Hz	100Hz	1kHz	10kHz	100kHz	1MHz
		-40dBc/Hz	-104dBc/Hz	-132dBc/Hz	-147dBc/Hz	-152dBc/Hz	-150dBc/Hz

FREQUENCY STABILITY OVER OPERATING TEMPERATURE RANGE PART NUMBER CODES

Stability	±25ppm	±50ppm	±100ppm
Commercial 'C' -10° to +70°C	A	B	C
Industrial 'I' -40° to +85°C	D	E	F

PART NUMBERING PROCEDURE

Example = 3G576B-80N-27.000

