


- Industry-standard 11.4 x 9.6 x 3mm 4 pad SMD package
- Frequency range 1.25MHz to 50.0MHz
- CMOS Output
- Supply Voltage 2.5 or 3.3 VDC
- Integrated Phase Jitter 1ps maximum
- Tunability $\pm 50\text{ppm} \sim \pm 200\text{ppm}$



DESCRIPTION & APPLICATIONS

G43 VCXOs are packaged in an industry-standard 11.4 x 9.6 x 3mm, 4 pad SMD package. G series VCXOs use fundamental mode crystal oscillators for low phase noise. Applications include phase lock loop, SONET/ATM, set-top boxes, MPEG, audio/video modulation, video game consoles, Fibre Channel, FPGAs, Data Acquisition and HDTV.


SUPPLY VOLTAGE-DEPENDENT SPECIFICATION

Input Voltage (Vdd):	Vdd = +2.5VDC $\pm 5\%$	Vdd = +3.3VDC $\pm 10\%$
Frequency Range*:	1.25MHz ~ 50.0MHz	1.25MHz ~ 50.0MHz
Output Waveform:	CMOS	CMOS
Initial Frequency Accuracy:	To tune to nominal fr. with Vc=1.25 \pm 0.2V	To tune to nominal fr. with Vc=1.65 \pm 0.2V
Output Logic HIGH '1'	CMOS: 2.25V (min.)	2.97V (min.)
Output Logic LOW '0'	CMOS: 0.25V (max.)	0.33 (max.)
Frequency Deviation Range:	Standard: $\pm 80\text{ppm}$ (min.)	Standard: $\pm 80\text{ppm}$ (min.)
Control Voltage Centre	1.25VDC	1.65VDC
Control Voltage Range:	0.25V to 2.25V	0.3V to 3.0V

GENERAL SPECIFICATION

Frequency Stability:	See table (page 2)
Frequency Change vs. Input Voltage:	$\pm 5\text{ppm}$ max. (VDD $\pm 5\%$)
Input Voltage:	+2.5V $\pm 5\%$, +3.3V $\pm 10\%$
Output Load:	15pF max.
Rise/Fall Time:	6ns max, 4ns typ. (10%~90% Vdd)
Duty Cycle:	50 $\pm 10\%$ standard, 50 $\pm 5\%$ option
Integrated Phase Jitter:	1ps max, (12kHz to 20MHz)
Start-up time:	10ms max., 3ms typical
Current Consumption:	10 to 45mA, frequency dependant (27MHz: 10mA typical at 3.3V)
Linearity:	6% typical, 10% maximum
Modulation Bandwidth:	10kHz min., measured at -3dB
Input Impedance:	5M Ω typical
Slope Polarity:	Monotonic and Positive, increasing control voltage increases output frequency.
Ageing:	$\pm 3\text{ppm}$ per year maximum
Storage Temperature:	-55C +125C
RoHS Status:	RoHS Compliant and lead (Pb) free

OUTLINE & DIMENSIONS

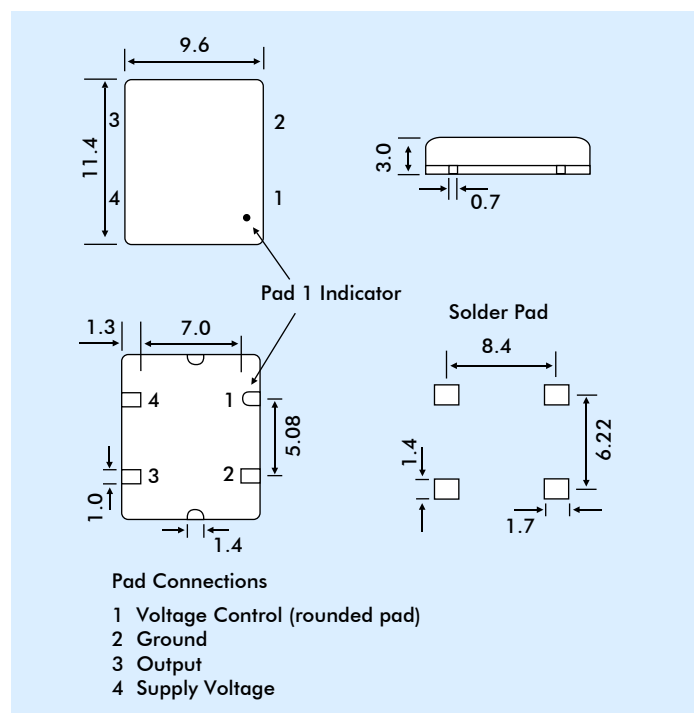

PHASE NOISE

27.0MHz 3.3V supply	Offset:	10Hz	100Hz	1kHz	10kHz	100kHz	1MHz
			-40dBc/Hz	-104dBc/Hz	-132dBc/Hz	-147dBc/Hz	-152dBc/Hz

FREQUENCY STABILITY OVER OPERATING TEMPERATURE RANGE PART NUMBER CODES

Stability	±25ppm	±50ppm	±100ppm
Commercial 'C' -10° to +70°C	A	B	C
Industrial 'I' -40° to +85°C	D	E	F

PART NUMBERING PROCEDURE

Example = 3G43B-80N-27.000

