


EQHMB Series Oscillators

3.0MHz to 200MHz

- Provides up to 18dB reduction in system EMI
- 'Drop-in' replacement for standard clocks
- Choice of modulation rate and spread
- SMD package that comes in: 5.0 x 3.2mm, 7.0 x 5.0mm and 11.4 x 9.6mm



In electrical systems the principal cause of electro-magnetic interference (EMI) is the system clock oscillator. Traditional methods of 'patching-up' systems with too high a level of EMI is to use ferrite beads, filters, ground planes, metal shielding and similar costly methods, However, the most efficient and economic method to reduce EMI is to reduce it at source: replace the system clock oscillator with a low EMI clock oscillator.

Compared with conventional clock oscillators, Spread Spectrum (Dithered) Oscillators can reduce EMI by as much as 18dB. The part is a 'drop-in' replacement for a standard clock oscillator hence there is no requirement to re-design existing PCBs.

DESCRIPTION

EQHMB series low EMI oscillators can reduce system EMI by 18dB. The oscillators are a 'drop-in' replacement for standard oscillators. EMI reduction is achieved by the use of Spread Spectrum Technology whereby the mode energy is spread over a wider bandwidth. The modulation carrier frequency, operating in the kHz region, makes the process transparent to the oscillator frequency. There is a choice of modulation rates and spread to suit application requirements.

SPREAD SPECTRUM TECHNOLOGY


Unlike a conventional clock oscillator, in a Spread Spectrum Clock Oscillator the mode energy is spread over a wider bandwidth. This is achieved by the frequency modulation technique. The controlled modulation process may be applied to the 'down' side of the nominal frequency (known as **DOWN SPREAD**), or spread equally either side of nominal (**CENTRE SPREAD**). Down Spread is preferred if over-clocking would cause a problem to the system.

APPLICATIONS

- Printers, Multiple Function Printers (MPCs)
- Digital Copiers; PDAs
- Networking: LAN/WAN; Routers
- Storage Systems (CD-ROM, VCD, DVD, HDD)
- Scanners; Modems; Projectors
- Embedded Systems
- Musical Instruments
- Automotive: GPS car navigation systems
- LCD PC Monitors; LSD TVs
- ADSL; PCMCIA
- Still Digital Cameras (SDCs)

MODULATION TYPES - EXAMPLES

Output amplitude (dB) vs. frequency span (MHz)

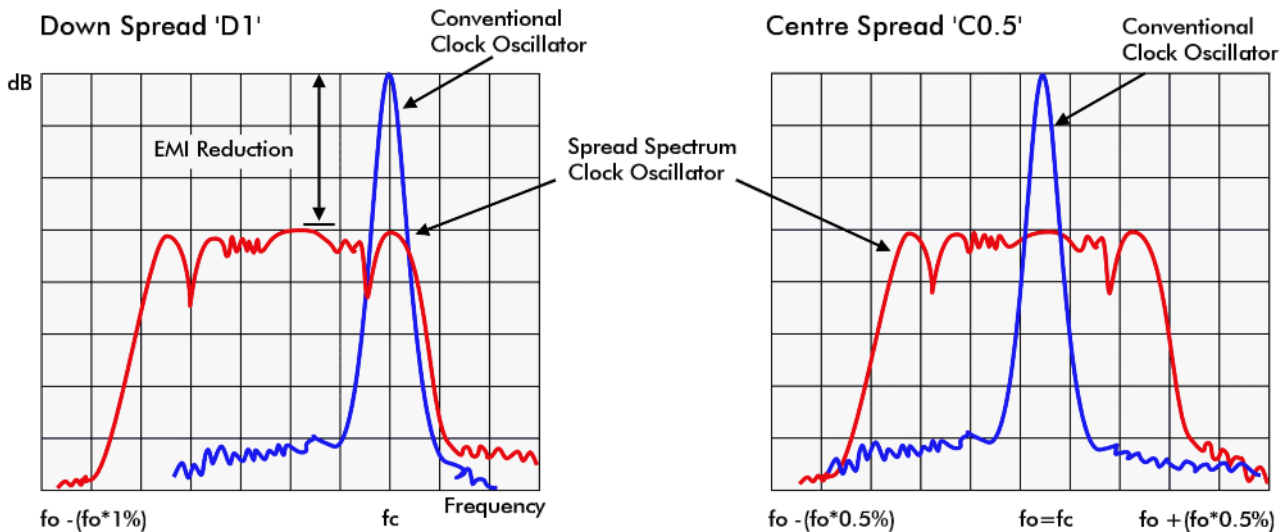

SPECIFICATION

Series No:	EQHM (Group 'B')
Frequency Range:	3.0MHz to 200MHz
Modulation Carrier Frequency:	30kHz min, 40.0kHz max.
Output Logic:	CMOS
Input Voltage:	Vdd = +2.5VDC ±10% Vdd = +3.3VDC ±10%
Frequency Stability***	
Commercial (-10~70°C):	±25ppm (Spec. code = 'A') ±50ppm (Spec. code = 'B') ±100ppm (Spec. code = 'C')
Industrial (-40~+85°C):	±25ppm (Spec. code = 'D') ±50ppm (Spec. code = 'E') ±100ppm (Spec. code = 'F')
Output Voltage HIGH '1':	90% of Vdd
Output Voltage LOW '0':	10% of Vdd
Rise/fall Times:	5.0ns max, (frequency dependant)
Load:	15pF
Start-up Time:	3ms typical, 5ms max.
Storage Temperature:	-55° to +125°C
Current Consumption:	
3MHz ~ 100MHz	20 mA (max.)
101MHz ~ 200MHz	30 mA (max.)
Duty Cycle:	50%±10% (CL=15pF, 50%Vdd)
Cycle to Cycle Jitter:	±250ps typ. ±300ps max.
Output Impedance:	40 Ohms typical
Static Discharge Voltage:	>2000V (per MIL STD 833)
Ageing:	±5ppm /year max at Ta=25°C
Packaging:	EIA 16mm tape and reel, 1k per.
Pad 1 Option:	Output Enable/Disable. Output is high impedance when taken low Output enable time 100ms max.

ENVIRONMENTAL SPECIFICATION

RoHS Compliance:	RoHS compliant and Pb (lead) free
Storage Temperature Range:	-55° to +125°C
Humidity:	85% RH, 85°C for 48 hours
Hermetic Seal:	Leak Rate 2x10 ⁻⁸ ATM-cm ³ /s max.
Solderability:	MIL-STD-2002F method 208E
Reflow:	260° for 10 seconds
Vibration:	MIL-STD-202F method 204, 35g 50Hz to 2000Hz
Shock:	MIL-STD-202F method 213B, test condition: E, 1000g ½ sine wave

AVAILABILITY OF SPREAD TYPES AND MODULATION RATES


SPREAD TYPES and % MODULATION	
DOWN SPREAD	
D0.25	-0.25%
D4.0	-4.0%
CENTRE SPREAD	
C0.125	±0.125%
C2.0	±2.0%

^ Table 1


*** Frequency Stability parameter excludes modulation.

PART NUMBER CONFIGURATION


Part Number Example: **3EQHM572B-BT-32.768R-C.05**

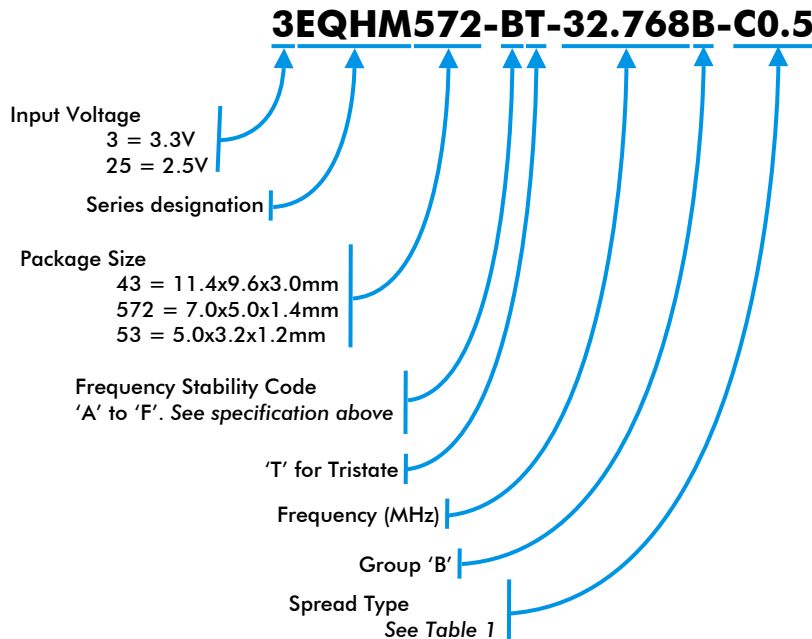


OUTLINE & DIMENSIONS

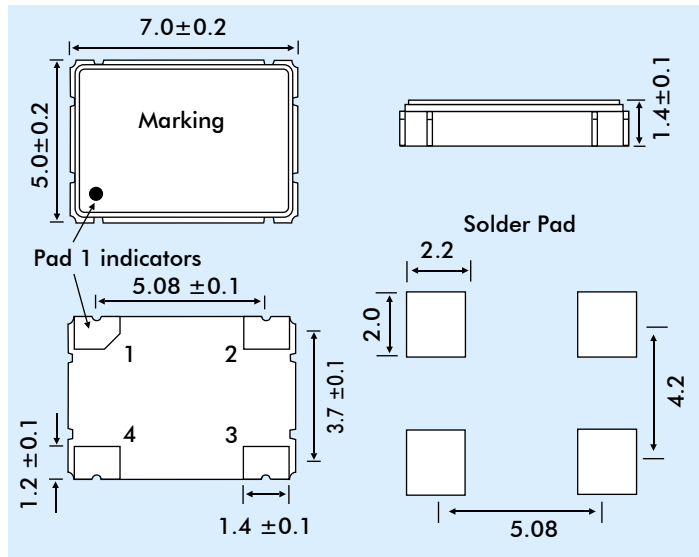

EQHM572

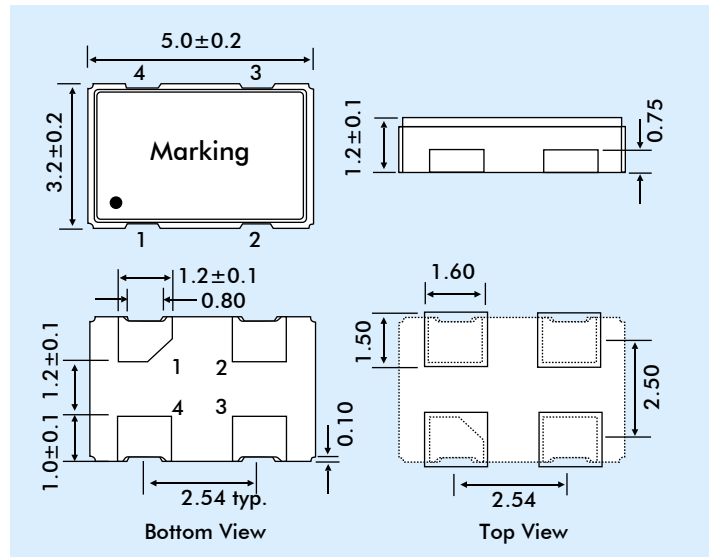

EQHM53

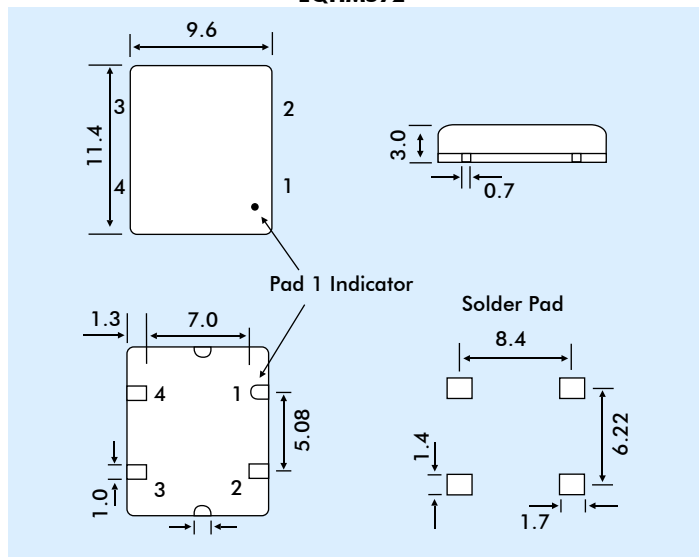

EQHM43

Pad Connections

- 1 Not connected or Tristate (enable/disable)
- 2 Ground
- 3 Output
- 4 Supply Voltage