

DESCRIPTION

Statek's NTXO/NTXOHG are small, low power, clean reference sources that fill the stability gap between conventional clock oscillators and TCXO reference sources. Manufactured for high-reliability applications that require a stable reference, these oscillators offer a total frequency tolerance as low as ± 5 ppm over -40°C to $+85^{\circ}\text{C}$ as well as high-shock survivability. This product is housed in a hermetically sealed ceramic package.

FEATURES

- Built-in internal decoupling capacitor (VDD to GND)
- High shock resistance (HG version) up to 50,000 g
- Wide 1.62 V to 3.63 V operating voltage range
- Phase noise 32 MHz (-160 dBc/Hz) @100 kHz
- Integrated RMS phase jitter 32 MHz (135 fs)
- Low current consumption; 1.5 mA 26 MHz 3.3 V, 10 pF load
- Military testing available
- Ultra-low Allan deviation and phase noise
- Low acceleration sensitivity and phase jitter
- Clipped sine output (CMOS available - contact Statek)
- Voltage control ± 5 ppm (optional)
- Fundamental frequency; no PLL artifacts
- Designed and manufactured in the USA

APPLICATIONS

Industrial, Defense and Aerospace


- RF Telemetry
- Guidance and Navigation Systems
- Ground Control Stations
- Communications
- Handheld Devices and Instrumentation

PACKAGING OPTIONS


- Tray Pack
- Tape and Reel (per EIA 481). See Tape and Reel datasheet 10109.

PIN CONNECTIONS

1. Voltage Control, OE (Oscillator Enable/Disable), not connected (N)
2. Ground
3. Output
4. V_{DD}

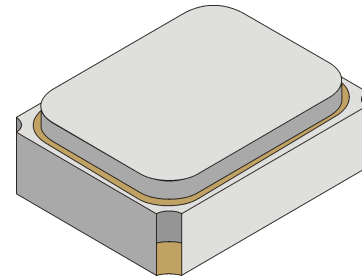


DIMENSIONS

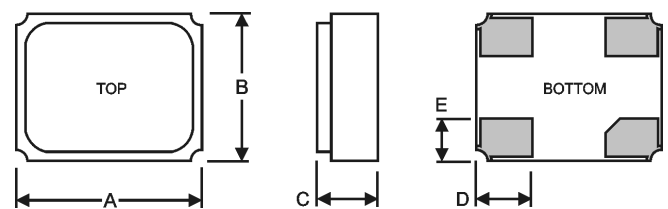

DIM (mm)	Termination	TYPICAL	MAXIMUM
A		3.25	3.48
B		2.50	2.73
C	SM1	1.12	1.25
	SM3/SM5	1.24	1.37
D		1.02	1.14
E		0.76	0.89

SUGGESTED LAND PATTERN

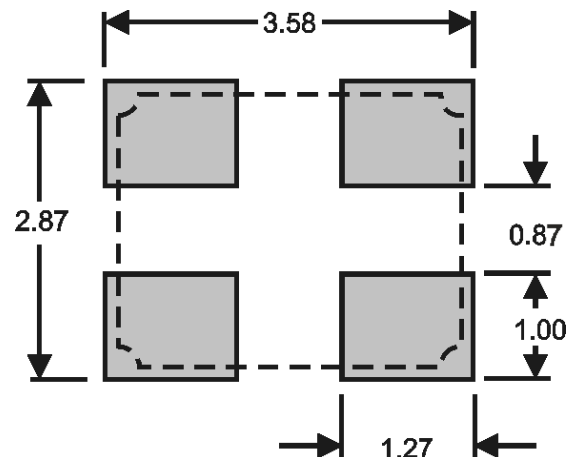

SPECIFICATIONS

Specifications are typical at 25°C unless otherwise noted. Specifications are subject to change without notice. Tighter specifications available.

Frequency Range	8 MHz to 64 MHz
Supply Voltage (V_{DD})	1.8 V \pm 5% (2.5 V, 3.0 V and 3.3 V \pm 10%)
Total Frequency Tolerance ¹	As low as \pm 5 ppm (Industrial)
Typical Supply Current ²	1.5 mA @ load
Output Voltage Level (Clipped sinewave)	0.90 V _{p-p} Typical
Output Load (Clipped sinewave)	10 pF 10 k Ω
Start-up Time	2 ms Typical, 5 ms MAX
Voltage Control (Pin 1) (OV to V_{DD})	\pm 5 ppm Typical
OE Standby Current Oscillator Off ⁶	2.0 μ A (Pin 1 Low OV) (Pin 1 OE Mode)
Aging, first year	\pm 2 ppm
Shock Survival ³	STD: 5,000 g, 0.5 ms, ½ sine HG: Up to 50,000 g, 0.5 ms, ½ sine
Vibration Survival ⁴	20 g, 10-2,000 Hz swept sine
Operating Temperature Range	-40°C to +85°C (Industrial)
Storage Temperature Range	-55°C to +125°C
Max Process Temperature	260°C for 20 seconds
MIN/MAX Supply Voltage (V_{DD}) ⁵	-0.3 V / 3.63 V
Absolute Maximum Rating (Pin 1) ⁵	(V_{DD} -0.3V) to (V_{DD} +0.3V)
Moisture Sensitivity Level (MSL)	This product is hermetically sealed and is not moisture sensitive.

1. Includes aging first year.

2. V_{DD} = 3.3 V, 10 pF load, frequency at 26 MHz.

3. Contact factory for higher shock rating.

4. Per MIL-STD-202, Method 204, Condition D. Random vibration testing also available.


5. Do not exceed the absolute maximum ratings.

6. Pin 1 OE, high level (oscillator run) \geq 90% V_{DD} , low level stop \leq 10% V_{DD} .

HOW TO ORDER STATEK MTXO OSCILLATOR

NTXO	HG	4	B	OE	S	SM3	—	40.0M	,	—	/	—	/	5	/	I
High Shock HG = High Shock Blank = Standard		Shock Level Code Blank = 5,000 g B = 10,000 g C = 20,000 g D = 30,000 g F = 50,000 g		Special Blank = Standard S = Special or Custom				Frequency M = MHz						Total Frequency Tolerance¹ (in ppm)		
Supply Voltage 1 = 1.8 V 2 = 2.5 V 3 = 3.0 V 4 = 3.3 V				OE = Oscillator Enable VC = Voltage Control N = Not Connected		Terminations SM1 = Gold Plated (Lead Free) SM3 = Solder (60/40 Sn-Pb) SM5 = Solder (Lead Free)								Operating Temp. Range I = -40°C to +85°C S = Customer Specified		

PHASE NOISE AND JITTER PERFORMANCE

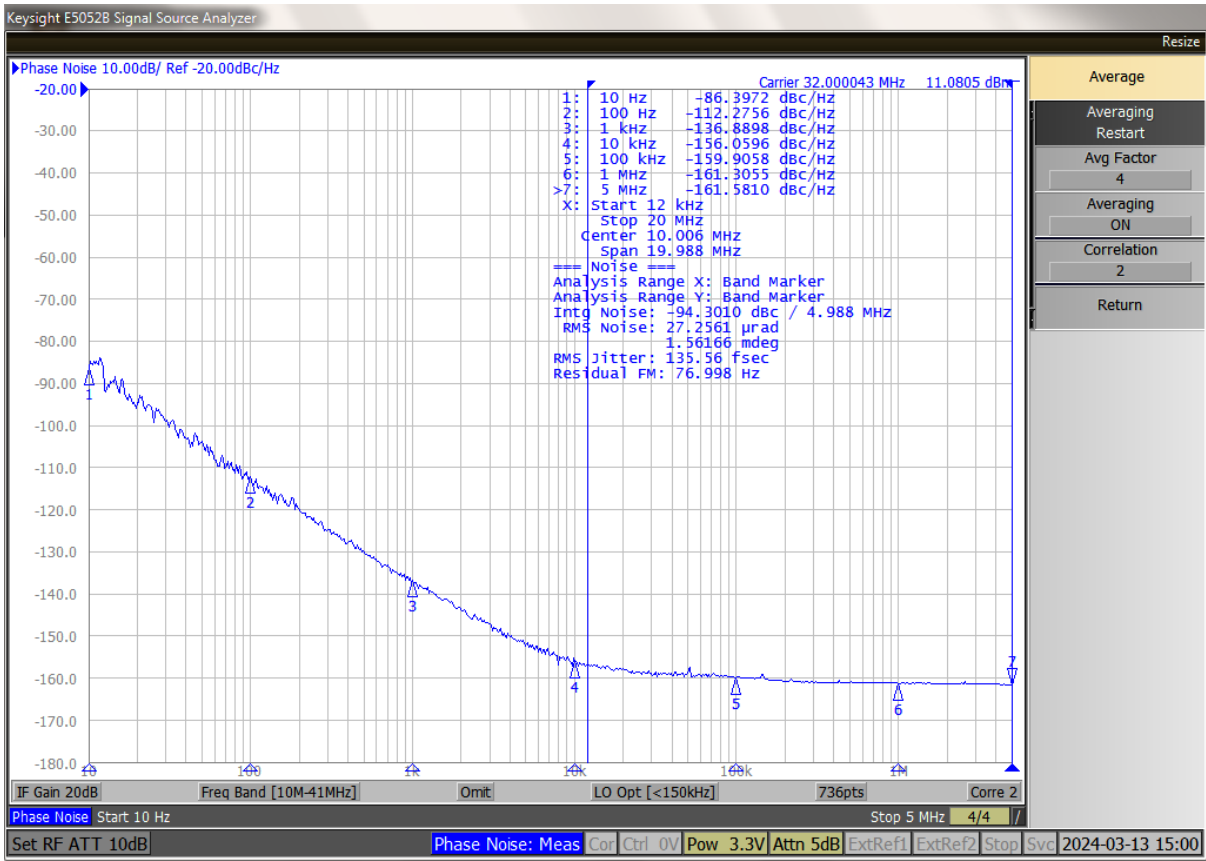

Typical phase noise [dBc/Hz]

Offset Frequency	32 MHz
10 Hz	-86
100 Hz	-112
1 kHz	-137
10 kHz	-156
100 kHz	-160
1 MHz	-161
5 MHz	-161

Integrated RMS phase jitter¹

Frequency	V _{DD} = 3.3 V
32 MHz	135 fs

1. 12 kHz to 20 MHz typical, unless noted otherwise.

