



frequency control solutions

T1254

RADIATION TOLERANT
ULTRA-LOW ACCELERATION SENSITIVITY

tcxo

Product Description

Greenray Industries' T1254 TCXO offers excellent performance in high shock and vibration environments in a rugged, radiation tolerant package.



Features

- 30 krad (Si) total ionizing dose
- Rugged, hermetic 20.3 x 12.7 mm package
- Frequency: 10 to 100 MHz
- Stability: ± 3.0 ppm (-20°C to +70°C)
- Ultra-low acceleration sensitivity < 0.07 ppb/g
- +3.3 or +5 VDC supply
- CMOS output

Applications

- High orbit transponders
- Low orbit satellites (nano/micro satellites)
- RF telemetry systems
- Multiband terminal
- Upconverter

REV: F



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2015 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T1254 SERIES
10 MHz to 100 MHz

Electrical Characteristics

Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency	@ +25°C	10		100	MHz	(FREQ.)
Frequency Stability	-20°C to +70°C		± 3.0		ppm	N36
	-40°C to +85°C		± 5.0		ppm	T56
	-55°C to +125°C		± 7.0		ppm	X76
Aging	1 st year			± 1.0	ppm	
				2.5	ppb/g	SG
Acceleration Sensitivity	Worst axis tested @ 90 Hz, 10 g			0.7	ppb/g	LG
				0.07	ppb/g	ULG
Frequency vs Voltage	For a 2% change			± 0.3	ppm	
Frequency Adjust (EFC)	0 to Supply, Negative Slope	± 7.0			ppm	

Phase Noise Performance

Parameter	Frequency Offset (Hz)	Min	Typical	Max	Units	Ordering Code
Static @ 10 MHz Nom. Freq.	10		-90		dBc/Hz	
	100		-120		dBc/Hz	
	1 k		-145		dBc/Hz	
	10 k		-150		dBc/Hz	
	100 k		-155		dBc/Hz	

DC Supply

Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Supply Voltage	± 5%	3.0	3.3	3.6	Vdc	B
	± 5%	4.75	5.0	5.25	Vdc	E
Supply Current				35	mA	

RF Output

Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
CMOS						C
Load			15		pF	
Level		0.8 Vdd "1" Level		0.2 Vdd "0" Level	V	
Symmetry		40	50	60	%	



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
 TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary. Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2015 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T1254 SERIES
10 MHz to 100 MHz



Environmental and Mechanical Specifications

Test	Standard	Method	Condition	Description
Vibration	MIL-STD-883	2007	A	50 g, 20 to 2,000 Hz, swept sine
Shock	MIL-STD-883	2002	B	1,500 g, 0.5 ms half-sine

Recommendations and General Information

Parameter	Notes
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +125°C
Radiation	Unit shall continue to operate during exposure to 30 krad (Si)
Terminal Finish	Sn 100 (Lead-free), SnPb 63/37 (non-RoHS)
Package Weight	3 grams
Package Finish	Stainless Steel and Ni plated Kovar
Soldering Instruction	Hand Solder
Shipping	Tray Pack
Marking	GRI Logo, Model #, Frequency, Serial #, Date Code Addition marking upon request if space is available

Ordering Example

T1254	-	T	56	-	B	-	SG	-	10.0 MHz	-	LF
Model	Temp. Range	Stability	Supply Voltage		G-Sensitivity		Freq. (MHz)		Term. Finish		

The Order ID (T1254-T56-B-SG-10.0MHz-LF) is only used to issue the preliminary quote. The Part Number (T1254-1) for the quoted Electrical Characteristics, Screenings, and other options, will be provided with the Greenray Sales Order.

Other specification options are available, please use the contact information below for more information.



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2015 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.




frequency control solutions

T1254 SERIES
10 MHz to 100 MHz



Package Information

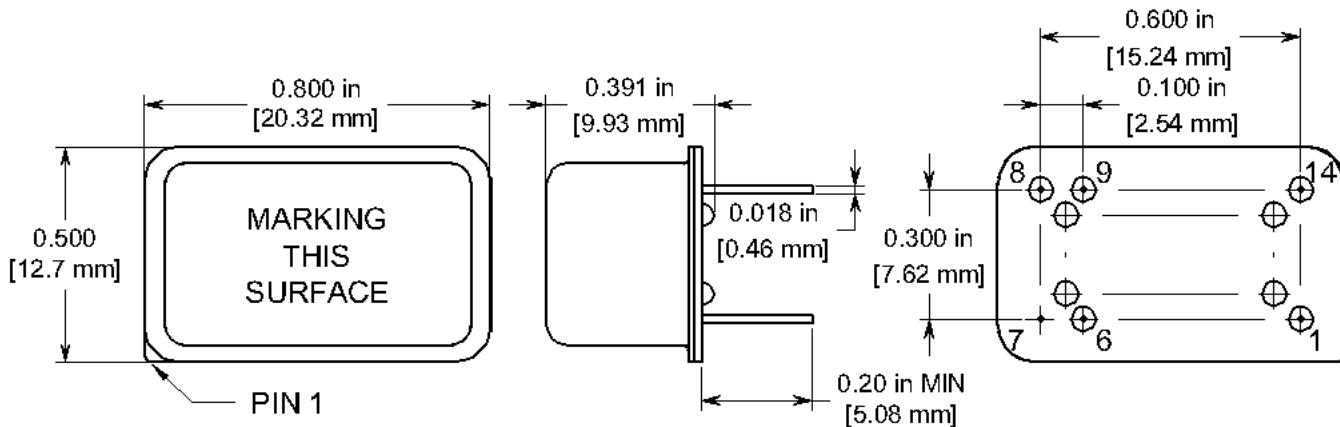

PAD CONNECTIONS	
1	CONTROL VOLTAGE (EFC)
6	NO CONNECT (NC)
7	0V & CASE GND
8	OUTPUT
9	NO CONNECT (NC)
14	SUPPLY VOLTAGE (Vdd)

(NC Pads may have internal connections and should be isolated)



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2015 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.