


**TYPE:** DIELECTRIC FILTER  
**Specification Number:** EQZ002220  
**Specification Code:** CAF33C1922P05A  
**Stock No:**  
**Description:** 1922.5MHz Dielectric Filter

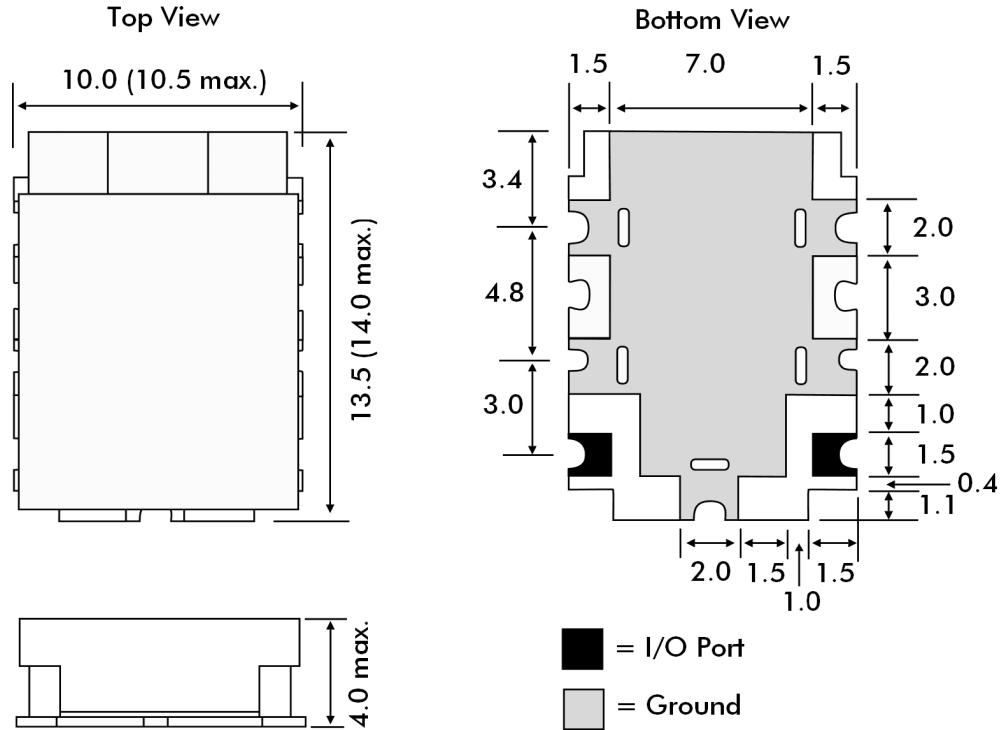

**Electrical Specification:**

Centre Frequency: 1922.5MHz  
 Bandwidth:  $f_0 \pm 2.5\text{MHz}$   
 Insertion Loss: 3.dB maximum  
 Ripple in BW: 1.0dB maximum  
 V.S.W.R. In BW: 2.0:1  
 Attenuation: 3.0dB minimum @ 4.6MHz  
 (Absolute value)  
 Input/Output Impedance: 50 Ohms  
 Operating Temperature Range: -40° to +85°C

<b>Issue No:</b>	ONE	<b>EQZ002220 DIELECTRIC FILTER CAF33C1922P05A</b>	<b>Drawing</b>	EQZ002220
<b>Issued by:</b>	John Dale		<b>Stock No:</b>	
<b>Date:</b>	22nd May 2006		<b>Page:</b>	1 of 1
<b>Checked by:</b>				